

EclProfile CT+IP

Waterproofed high quality six colours LED ellipsoidal, Tunable White and colour mixing



The **EclProfile CT+IP** is a tunable white and full colour IP LED ellipsoidal designed for exterior applications such as touring, theme parks, cruise ships, and any outdoor events. It uses the same 6-colour LED source than its indoor version, but with a 30% higher lumen output, as it's equipped **with** a bigger power-supply and heat sink. The IP body of the fixtures takes any of the standard lenses and accessories of the EclProfile range. Its custom LED array and the powerful on-board colour control allows reaching bright and high-quality whites, up to 97 CRI, keeping a consistent colour output and ensuring a total control of the light. The wide feature set includes special theatrical functions such as tungsten emulation on dimming and colours, LEE colour presets, virtual CTO and studio functions, such as green and magenta tuning on white presets.

MAIN FEATURES

- IP rated for exterior applications
- Rotating gobo IP65
- Linear white CCT from 2,800K to 10,000K, CRI up to 96
- Industry-standard colour gel matching, tungsten emulation on dimming, tint control (+/- green).

VERSIONS

Code	Housing
ECLCTPLUSIPBK	Black
ECLCTPLUSIPWH	White

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 96x3W 6 colour custom LEDs source (red, green, blue, royal blue, mint, pc amber)
- CCT: @full 5.000K
- Luminous flux: (5°) 3'805 lm; (10°) 4'790 lm; (14°) 5'047 lm; (19°) 5'380 lm; (26°) 6'681 lm; (36°) 6'814 lm; (50°) 5'773 lm; (70°) 7'430lm @full
- Luminous flux: (zoom 15°-30°) (min angle) 5'290 lm; (max angle) 6'664 lm - (zoom 25°-50°) (min angle) 7'042 lm; (max angle) 9'817 @full
- Lux: (5°) 14'638 lx; (10°) 8'663 lx; (14°) 3'812 lx; (19°) 2'530 lx; (26°) 1'759 lx; (36°) 810 lx; (50°) 474 lx; (70°) 306lx @5 m full
- Lux: (zoom 15°-30°) (min angle) 3'502 lx; (max angle) 1'800 lx - (zoom 25°-50°) (min angle) 2'608 lx; (max angle) 974lx @5 m full
- CRI: 93,7 @3.200 K; 97,6 @5.600 K
- R9: 98,6 @3.200 K; 98,2 @5.600 K
- TLCI: 95 @5.600 K
- TM30 Rf: 92 @5.600 K
- TM30 Rg: 100,1 @5.600 K
- Source life expectancy: > 50.000 h

OPTICS

- Lens type: high-quality glass lens optics
- Additional optics: optional 5° / 10° / 14° / 19° / 26° / 36° / 50° / 70° / zoom 15°-30° / zoom 25°-50°
- Focus: manual
- Other: see available accessories

COLOUR SYSTEM

- Colour mixing: RGB, Royal Blue, Mint, PC Amber
- CCT: CCT control, + / - green correction, tungsten emulation
- White presets: 2.800 K ~ 10.000K
- Colour wheel: LEE filter emulation and RGB / HSI / CMY input mode selectable

DYNAMIC EFFECTS

- Rotating gobos: 1 rotating gobo controlled on DMX
- Gobo size: B, outer: 86 mm - image: 64,5 mm - thickness: 1,1 mm
- Special features: 4 fan modes available and output management and linear crossfade channel from any white to any colour; virtual CTO on colours

BODY

- Body: sturdy die-cast aluminium body
- Body colour: RAL 9004

CONTROL

- Protocols: DMX512, RDM
- Stand Alone: selection of static colours, white presets, manual colours and built-in effects with adjustable speed
- DMX channels: UNO / DUO / Basic / Standard / Extended / RAW Direct / RAW 16bit / XYchannel
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOX2) not included (through dedicated software)
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 25 Hz, electronic
- Operating temperature: -20° ~ +45°
- LED Control: flicker free operation
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 264W
- Output (at 230V): 7 units on a single power line
- Power factor: > 0,95

PHYSICAL

- IP rating: 65 for temporary outdoor application, not for fixed installation
- Cooling: low noise fan
- Suspension and fixing: bracket for hanging and positioning
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Power connection: Seetronic powerCON TRUE IP65 IN/OUT
- Dimensions (WxHxD): 264x259x539mm
- Weight: 10kg

CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

ACCESSORIES & RELATED PRODUCTS


▪ 9313FXWL03	Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, SETSAC3FX socket, L.3 m	▪ ECLPRLZ1530/2550BK	Zoom 15°-30°/25°-50° PRL lens barrel for EclProfile fixtures, black housing
▪ 9333FXWL03	Ass. 3x2.5mm TH07 cable, SHUKO plug, SETSAC3FX socket, L.3m	▪ ECLPRTPG	Gel filter frame for ECL Profile PRL lens barrel, comp. with 19°,26°,36° and 50°
▪ 938225L03	3x2.5mm TH07 Cable, 16A SETSAC3MX, 16A SETSAC3FX, L. 3m	▪ ECLPRGH	Gobo holder for ECL Profile fixtures
▪ C6002B	Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black	▪ ECLPRIRIS	Iris accessory for ECL Profile fixtures
▪ C6040B	Aluminum clamp for 28mm spigot, 200kg load, 48-51mm tubes, black	▪ ECLPRSEF1	Soft edge filter and holder kit for ECL Profile fixtures
▪ ECLLB05/10BK	5°/10° lens barrel for Ecl Profile fixtures, filterframe included, black housing	▪ C6040B	Aluminum clamp for 28mm spigot, 200kg load, 48-51mm tubes, black
▪ ECLPRL05/10/14/19/26/36/50/70BK	5°/10°/14°/26°/36°/50°/70° PRL lens barrel for EclProfile fixtures, black housing	▪ IPTESTBOX	Portable cacuum and pressure tester for ProLights IP fixtures
		▪ UPBOX2P5	Firmware uploader kit, USB IN, 5-pin XLR DMX OUT

PRESET FULL ON

Beam angle 50%: 26°

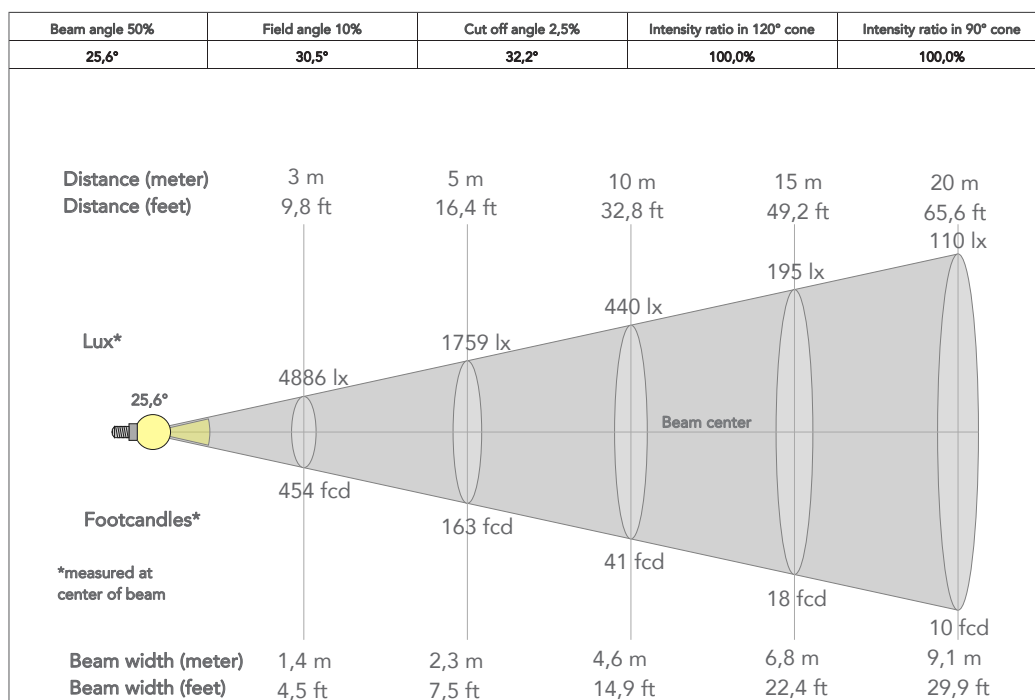

TECHNICAL DRAWINGS

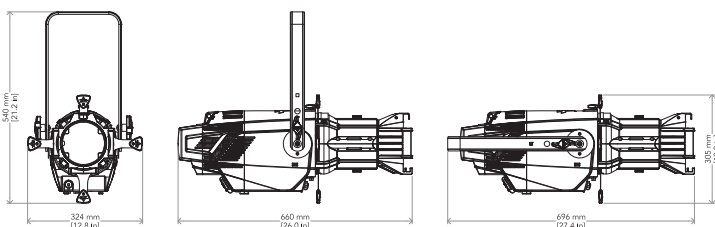

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
Certified to CSA STD: C22.2 NO. 166

Visit our website
for specifications and
tech documentations

